


# CrazyKnight Installation Guide

## Check all componets

\*Please check all components are included in the package before you go through.

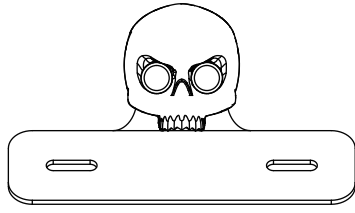

Crazy Knight x 1

Dressup sticker x 1

## Mounting

\*Ask local dealer for assistance if you are not familiar with mechanical engineering.  
\*Any damage will occur due to inappropriate installation or assembly.

Separate the wire between original taillight and your bike, make sure the length is just right in the position. Disassemble the original taillight from your bike, and then mount the Crazy-Knight into the position. With included M8 self-locking nut, please fasten the Crazy-Knight tightly and adjust the lighting direction .  
+ For a safety ride, always make sure the taillight lighting-direction is horizontal and parallel to your bike.  
+ More information please refer to [www.eur-lex.europa.eu](http://www.eur-lex.europa.eu).


## Electrical Connection

\*Ask local dealer for assistance if you are not familiar with mechanical engineering.  
\*Any damage will occur due to inappropriate installation or assembly.


Find the circuit diagram to the original wires in the wire loom for your bike, and connect to Crazy-Knight. The black wire marked as (-), please connect the wire to minus (ground) pole on the cut wire. The blue wire marked as (LICHT), please connect the wire to driving function pole of tail-light. The red wire marked as (BREMSE), please connect the wire to braking function pole of tail-light.  
+ Please make sure all wiring connection is under water-proof protection.

## TEST

\*All operation and usage on road driving should always follow the law restricted by each countries  
After mounting Crazy-Knight and finishing the wire connecting from the taillight to bike. Please give a quick test to the taillight. With correct function, Crazy-Knight will shine red in low brightness when it is under driving condition. And it will shine red in high brightness when it is under braking condition. The license plate light should always shine downward in all conditions.  
Please make sure the functions are always correct before your every trip, this is for your safety driving.

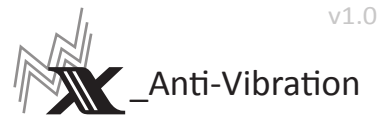

v1.0



**XENOLEN**®

Technical Support : [support@xenolen.com](mailto:support@xenolen.com)